

2. Screw options for all Mirror Mounts




Model 1	Model 2	Model 3	Model 4
Fit liner: 6 mm with band	Fit liner: 6 mm with band	Fit liner: 9,5 mm with band	Fit liner: 9,5 mm with band
Adjustment line: 6 mm	Adjustment line: 8 mm	Adjustment line 19 mm	Adjustment line: 12 mm (option 8 mm)
Thread: M4.15 x 0,25	Thread: M4.15 x 0,25	Thread: M 6.15 x 0,25	Thread: M 6.15 x 0,25
Milled head	Milled head	4 mm fit for plastic heads	Milled head
Top with braze ball	Top with braze ball	Top with braze ball	Top with braze ball



Options:

- Fine threaded screws with **150 µm/turn**
- Hexagon socket
- Hexagon socket with knurled head
- Counter nut

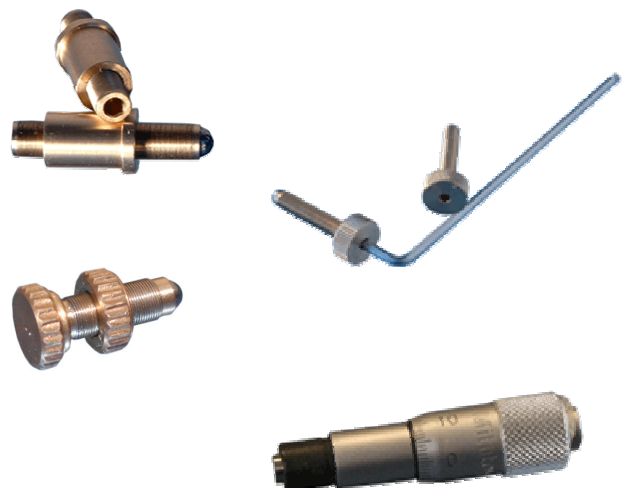

Micrometer- and Differential Micrometer screws

with **0,25 mm** thread pitch or **0,5 mm** thread pitch